


Polymax DIAMEX LOK Tiles

Interlocking PVC Tiles with durable, hardwearing and impact resistant properties at a cost effective price point. The tiles are produced from a recycled PVC and come in black only with a checker plate surface to maximise grip.

Product Details

- Hardwearing PVC Material
- Oil and Chemical Resistant
- Easy to install and maintain
- Simple to remove, replace and re-lay
- Insulate against damp, noise and cold
- Cost effective price point
- 100% Recycled Material

Premium grade is REACH Compliant.

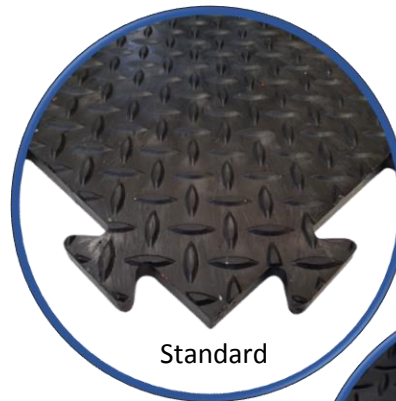

Standard



Premium

Applications

- Domestic and commercial garage
- Workshops
- Warehouses
- Workstations and assembly lines

Product Properties

Property	Standard	Premium
Dimensions	470mm x 470mm	470mm x 470mm
Thickness	14mm	14mm
Weight	7.6kgs / m2	6.8kgs / m2
Material	Recycled - Flexible DINP plasticised Polyvinyl Chloride (PVC)	Recycled - Flexible DINP plasticised Polyvinyl Chloride (PVC)
Visual	Black with imperfections	Black
Hygiene	Non-Porous PVC – Inhibits growth of bacteria	Non-Porous PVC – Inhibits growth of bacteria
Durability	One piece welded construction for maintenance free life	One piece welded construction for maintenance free life

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms. www.polymax.co.uk/sales-terms

Technical Data

Physical Properties	Standard	Premium
Slip Resistance	BS EN 13036-4:2011	BS EN 13036-4:2011
Fire Resistance	BS EN ISO 9239-1:2010 BS EN ISO 11925-2:2010 BFL-S1	UL 94 V-2
Load Tested	Up to 3.35t per tyre	Up to 3.35t per tile
Reach Compliant	No	Yes

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms. www.polymax.co.uk/sales-terms

