

Maximum Load: 44 Tonnes

Emergency Wheel Chock 235L x 160W x 140H

Product SKU: 1058666

Our selection of standard rubber wheel chocks suitable for various vehicles from caravans, car trailers, heavy goods vehicles and more.

Collection of wheel chocks made entirely from a hardwearing blend of SBR/NR rubber. They offer a longer service life in comparison to plastic alternatives but are a lot heavier to handle. Each chock comes with either an eye bolt, handle or rope to make help make handling easier. This is a specially designed emergency services wheel chock, made in response to fire fighters attending RTIs. The 1058666 has a restricted height to chock damaged vehicles involved in road incidents and similar situations. The extra large eye-bolt makes it easy for operatives wearing thick gloves to handle. Safety notice - Only select the appropriate wheel chock according to the type and size of your vehicle.


Colour: Black

Material: NR/SBR

Operating temperature range: -15°C to 70°C

Physical Property	Unit	Typical Values
Hardness	ShA	75
Elongation at Break	%	200
Tensile Strength	MPa	4
Weight	KG	3.5

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms

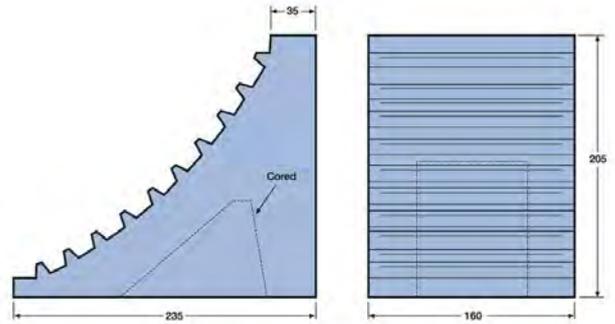

Maximum Load: 44 Tonnes

Rubber Wheel Chock Hollow 235L x 205W x 160H

Product SKU: 6008800

Our selection of standard rubber wheel chocks suitable for various vehicles from caravans, car trailers, heavy goods vehicles and more.

Collection of wheel chocks made entirely from a hardwearing blend of SBR/NR rubber. They offer a longer service life in comparison to plastic alternatives but are a lot heavier to handle. Each chock comes with either an eye bolt, handle or rope to make help make handling easier. The 6008800 and 6008801 use the same design but the 6008801 features a hollow core to reduce the weight and cost.


Colour: Black

Material: NR/SBR

Operating temperature range: -15°C to 70°C

Physical Property	Unit	Typical Values
Hardness	ShA	75
Elongation at Break	%	200
Tensile Strength	MPa	4
Weight	KG	3.6

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms

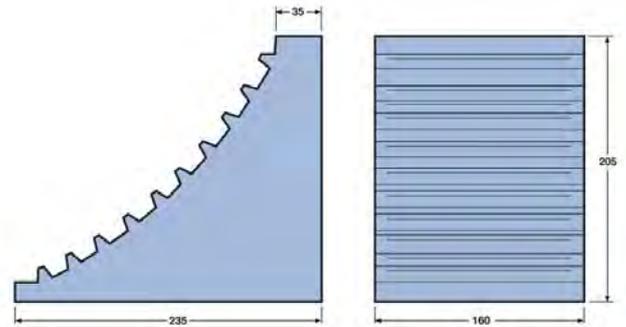

Maximum Load: 44 Tonnes

Rubber Wheel Chock Solid 235L x 205W x 160H

Product SKU: 6008801

Our selection of standard rubber wheel chocks suitable for various vehicles from caravans, car trailers, heavy goods vehicles and more.

Collection of wheel chocks made entirely from a hardwearing blend of SBR/NR rubber. They offer a longer service life in comparison to plastic alternatives but are a lot heavier to handle. Each chock comes with either an eye bolt, handle or rope to make help make handling easier. The 6008800 and 6008801 use the same design but the 6008801 features a hollow core to reduce the weight and cost.


Colour: Black

Material: NR/SBR

Operating temperature range: -15°C to 70°C

Physical Property	Unit	Typical Values
Hardness	ShA	75
Elongation at Break	%	200
Tensile Strength	MPa	4
Weight	KG	5.2

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms

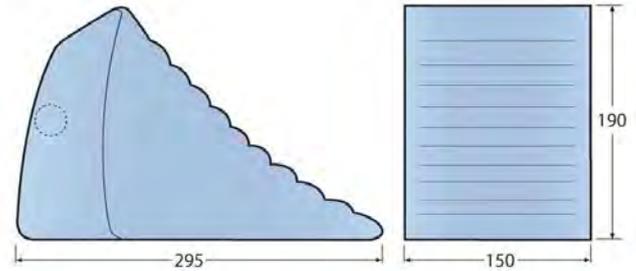

Maximum Load: 10 Tonnes

Rubber Wheel Chock With Handle 295L x 150W x 190H

Product SKU: 6008807

Our selection of standard rubber wheel chocks suitable for various vehicles from caravans, car trailers, heavy goods vehicles and more.

Collection of wheel chocks made entirely from a hardwearing blend of SBR/NR rubber. They offer a longer service life in comparison to plastic alternatives but are a lot heavier to handle. Each chock comes with either an eye bolt, handle or rope to make help make handling easier. For loads up to 10 tonnes, the 6008807 is a commonly used HGV wheel chock. It has a small amount of coring in the rubber to help reduce the weight and cost of the item. This is the only chock in the range to feature a built-in handle. Safety notice - Only select the appropriate wheel chock according to the type and size of your vehicle.


Colour: Black

Material: NR/SBR

Operating temperature range: -15°C to 70°C

Physical Property	Unit	Typical Values
Hardness	ShA	75
Elongation at Break	%	200
Tensile Strength	MPa	4
Weight	KG	4.25

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms

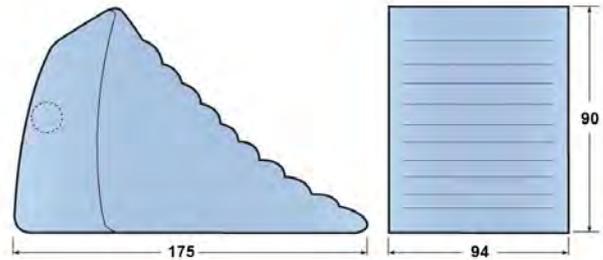

Maximum Load: 1 Tonne

Small Lightweight Wheel Chock 175L x 94W x 90H

Product SKU: 6009681

Our selection of standard rubber wheel chocks suitable for various vehicles from caravans, car trailers, heavy goods vehicles and more.

Collection of wheel chocks made entirely from a hardwearing blend of SBR/NR rubber. They offer a longer service life in comparison to plastic alternatives but are a lot heavier to handle. Each chock comes with either an eye bolt, handle or rope to make help make handling easier. The 6009681 is the lightest in the range and can be used with loads up to 1 tonne. This is the best chock for caravans, car trailers or smaller vehicles. Safety notice - Only select the appropriate wheel chock according to the type and size of your vehicle.

Colour: Black

Material: NR/SBR

Operating temperature range: -15°C to 70°C

Physical Property	Unit	Typical Values
Hardness	ShA	75
Elongation at Break	%	200
Tensile Strength	MPa	4
Weight	KG	0.66

Although the technical details and recommendations made correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use Polymax products must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product. All sales subject to our standard terms www.polymax.co.uk/sales-terms