
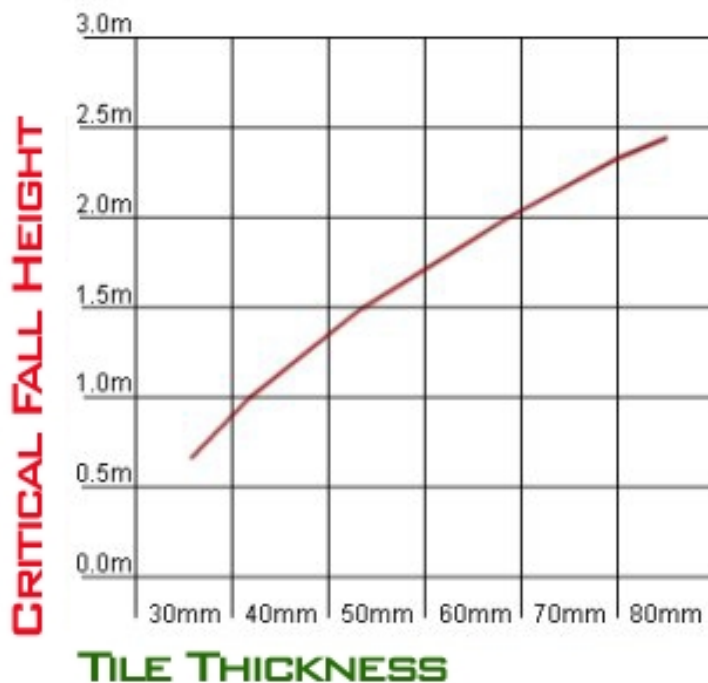


## Play Matting Tiles Spec-Sheet

Polymax produce composite rubber safety tiles that are manufactured from high grade environmentally friendly recycled rubber. The rubber is granulated, sieved and graded, which comprises 90% of the finished tile. The other 10% being polyurethane moisture curing pre-polymer.

The moulding process and stringent quality control, ensures that all safety tiles from Polymax Ltd. achieve a constant dimension, thickness, mass, and most importantly, performance.

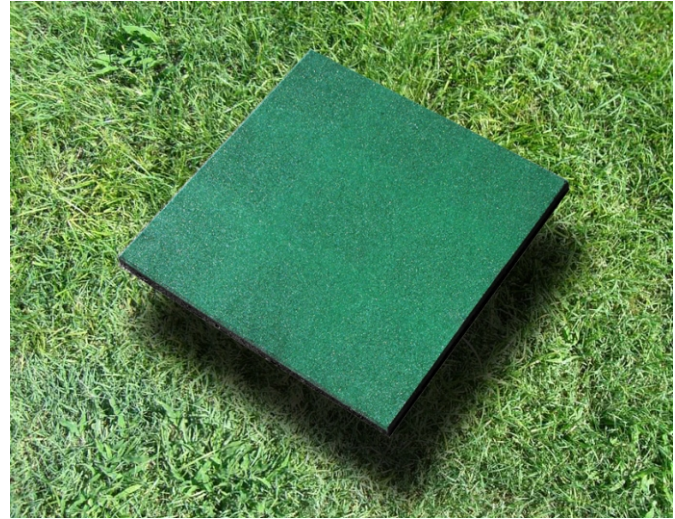

A special feature of Polymax safety tiles is the large hollow cone foot, and moulded base, which is designed to improve the critical fall height, and absorb much of the energy of a fall. This allows their use in a wide range of play area situations, and other leisure uses.

Polymax safety tiles are manufactured to the highest standards, and come in a range thickness from 20mm to 90mm. This ensures that the surface meets the specified critical fall height, over any size area, and on all installations.

Article No.	Thickness	Breadth	Lenght	Colour
1001379	30 mm	1000 mm	1000 mm	Green/Black
1001319	45 mm	1000 mm	1000 mm	Green/Black
1001320	30 mm	500 mm	500 mm	Green/Black (with pins)